


General Automated Packaging

# 2101

**Semi-automatic Stretch Wrapping Machine**

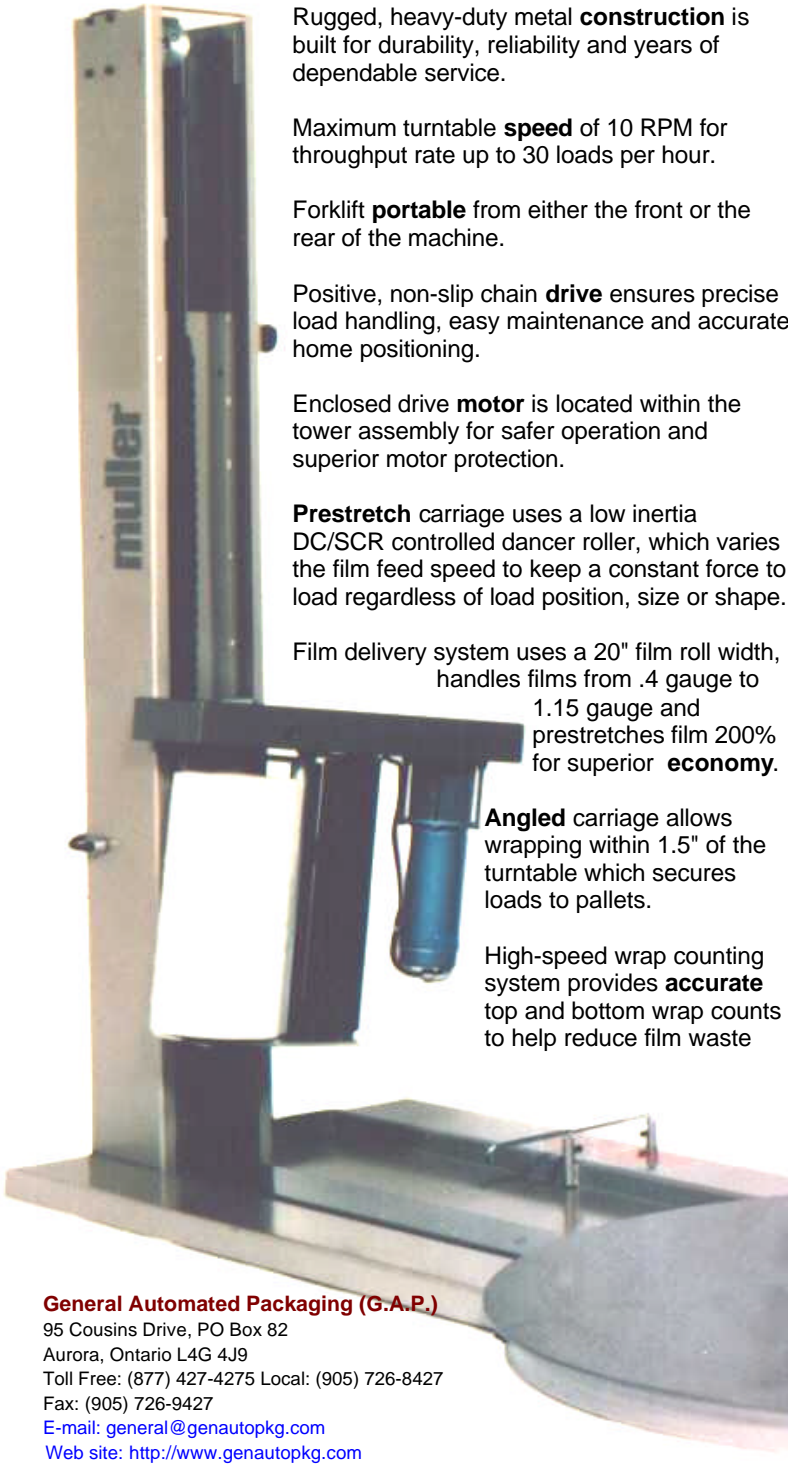

Rugged, heavy-duty metal **construction** is built for durability, reliability and years of dependable service.

Maximum turntable **speed** of 10 RPM for throughput rate up to 30 loads per hour.

Forklift **portable** from either the front or the rear of the machine.

Positive, non-slip chain **drive** ensures precise load handling, easy maintenance and accurate home positioning.

Enclosed drive **motor** is located within the tower assembly for safer operation and superior motor protection.

**Prestretch** carriage uses a low inertia DC/SCR controlled dancer roller, which varies the film feed speed to keep a constant force to load regardless of load position, size or shape.

Film delivery system uses a 20" film roll width, handles films from .4 gauge to 1.15 gauge and prestretches film 200% for superior **economy**.

**Angled** carriage allows wrapping within 1.5" of the turntable which secures loads to pallets.

High-speed wrap counting system provides **accurate** top and bottom wrap counts to help reduce film waste

**A new budget-priced semi-automatic turntable stretch wrapper designed for efficient and economical pallet wrapping in low to medium volume applications.**

**SPECIFICATIONS**

**Performance**

Loads per hour	Up to 30
Rotation speed	10 RPM
Maximum load size	60"L x 60"W
Maximum load diagonal	85"
Maximum load height	80"
Maximum load weight	3,500 lbs.

**Film Delivery Carriage**

Film size	20"
Prestretch type	Power assisted (on-off switch) (optional strain gauge available)
Prestretch level	200% std.(optional 100% - 300%)
Force to load	Spring loaded dancer bar
Construction	6061 machine aluminum

**Carriage lift system**

Lift type	Single #40 chain, nylon guides
Drive motor	1/2 HP 90 VDC TENV
Drive control	Variable speed /dynamic braking

**Electrical requirements**

Voltage	120 VAC, 15 amp, 60 Hz
---------	------------------------

**Turntable**

Diameter	60"
Construction	3/8" steel plate
Support	Bearings support

**Turntable drive**

Drive motor	1/2 HP 90 VDC TENV
Drive type	Spring tensioned #50 chain

**Frame construction**

Portability	Forklift from either end
Construction	Formed steel tower
Turntable skirt	1/2" steel
Shipping weight	1,300 lbs (approx)

**Controller**

Type	PLC
Control box	NEMA 12 dust tight
Pushbuttons	NEMA 4 industrial grade

**General Automated Packaging (G.A.P.)**

95 Cousins Drive, PO Box 82  
 Aurora, Ontario L4G 4J9  
 Toll Free: (877) 427-4275 Local: (905) 726-8427  
 Fax: (905) 726-9427  
 E-mail: [general@genautopkg.com](mailto:general@genautopkg.com)  
 Web site: <http://www.genautopkg.com>